



ASSEMBLY INSTRUCTIONS

1. Remove Everstand from box and fold out legs



2. Spin in feet to bottoms of all 4 legs



3. Using four provided $\frac{1}{4}$ " diameter by 1.5" long bolts and nuts, secure legs in all four corners




4. Adjust support channels to align with feet arrangement of heat pump and mount feet into channels using the provided 5/16" x 2.5" bolts, washers, nuts and vibration isolation pads



5. NOTE: if using a top discharge heat pump with a square footprint, you can flip the support channels so the "L" faces up. Align the channels so they cradle the heat pump and use the pre drilled holes if needed to secure the heat pump



EXPLODED VIEW

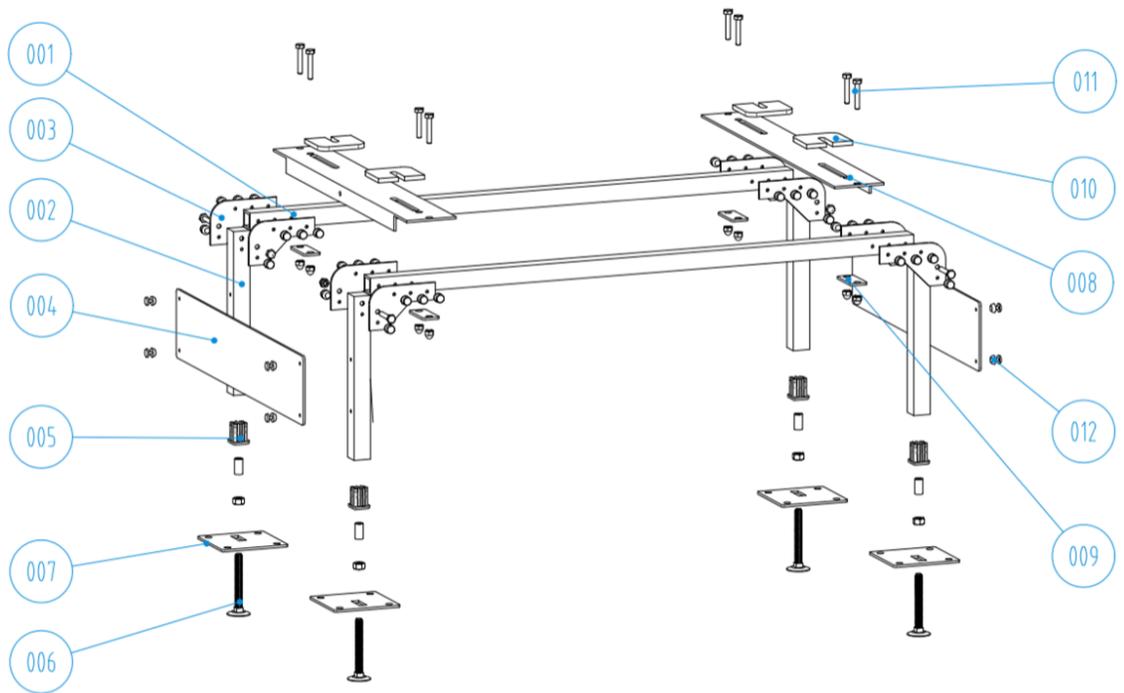

WWW.EVERSTANDS.COM

PATENT PENDING